

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 June 2004 (17.06.2004)

PCT

(10) International Publication Number
WO 2004/050247 A1

(51) International Patent Classification:
G01N 35/00, B81B 1/00

B01L 3/00,

(72) Inventors; and

(75) Inventors/Applicants (for US only): HOLMQUIST,
Mats [SE/SE]; Stora Slingan 20C, SE-192 73 Sollentuna
(SE). ENGSTROM, Johan [SE/SE]; Artillerigatan 12 B,
SE-752 37 Uppsala (SE).

(21) International Application Number:

PCT/SE2003/001850

(22) International Filing Date: 1 December 2003 (01.12.2003)

(74) Agent: BERGANDER, Hakan; Uppsala Science Park,
SE-751 83 Uppsala (SE).

(25) Filing Language:

English

(81) Designated States (national): CA, JP, US.

(26) Publication Language:

English

(84) Designated States (regional): European patent (AT, BE,
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,
IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(30) Priority Data:

0203595-4 2 December 2002 (02.12.2002) SE
60/430,978 5 December 2002 (05.12.2002) US


Published:

— with international search report

(71) Applicant (for all designated States except US): GYROS
AB [SE/SE]; Uppsala Science Park, SE-751 83 Uppsala
(SE).

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: PARALLEL PROCESSING OF MICROFLUIDIC DEVICES

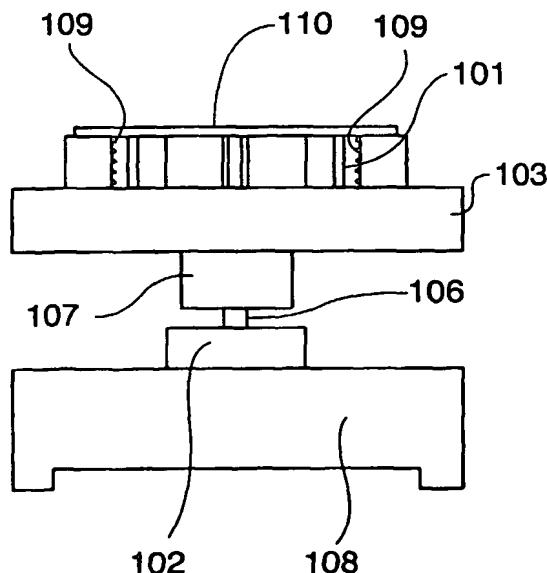

(57) Abstract: Microfluidic arrangement which comprises A) a number of microfluidic devices, and B) an instrument which comprises a spinner motor and a rotary member arranged such that liquid flow can be driven centrifugal force in each of the devices by spinning the . Each of the microfluidic devices comprises microchannel structures in a common planar layer I. The characteristic feature is that layer I of each device can be oriented radially and at an angle $\neq 0^\circ$ relative to the plane of the rotary member, with preference for 90° . The rotary member has seats for holding the devices. A microfluidic device comprising i) two essentially planar and parallel opposite sides, and edge sides, ii) a set of one, two, three or more essentially equal microchannel structures, each of which comprises a first inlet arrangement comprising an inlet port IP I₁. The characteristic feature is that a) each of the inlet ports is present in an edge side, and b) the wettability of the inner walls of said first inlet arrangement permits penetration by capillarity of at least a predetermined first volume of an aqueous liquid.